




Installation Catalog

Key points for installing 80x160 products

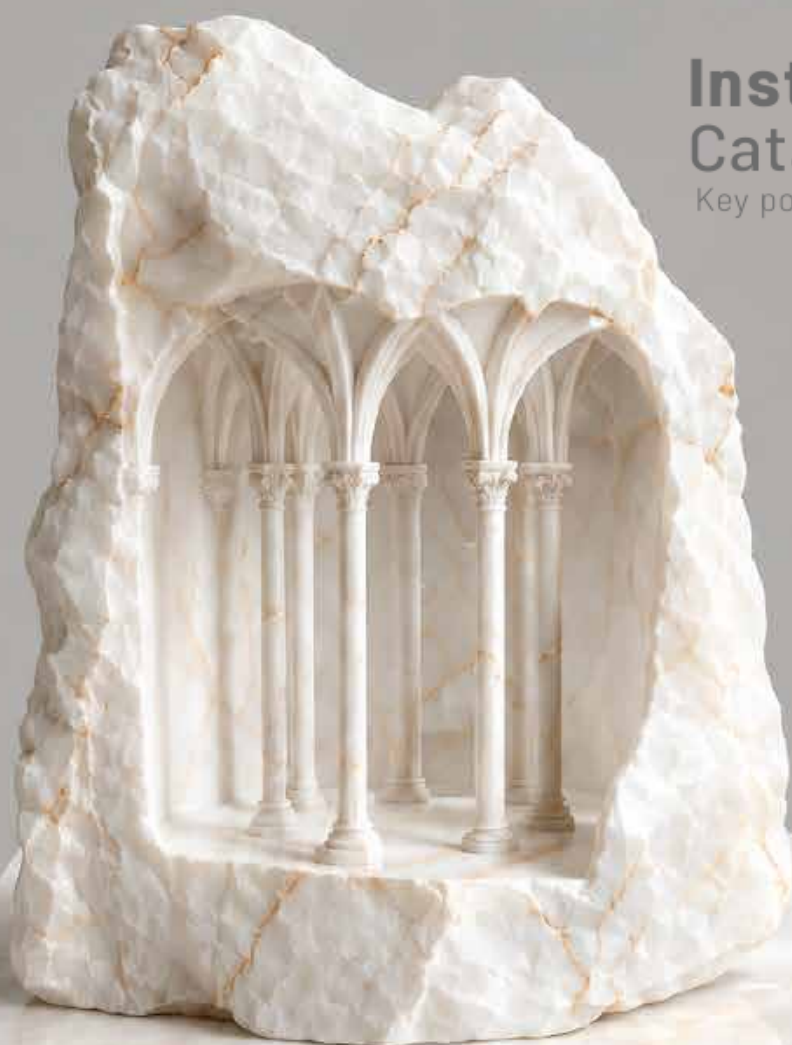

W A L L R O Y A L

Dear Customer,

Before installing 80x160 products, please carefully read and follow all of the instructions below to help prevent possible problems during and after installation.

Technical note: Effective/special-surface products require extra care during grouting and final cleaning to prevent damage, discoloration, staining, or grout residue remaining on the product surface.

Surface Preparation

1

The surface must be completely level, smooth, clean and dry. The substrate must not have excessive level differences; do not use tile adhesive to compensate for unevenness. Before installation, remove dust and contamination from both the back of the tile and the substrate.



Choosing the Adhesive

2

Use a high-quality tile adhesive suitable for large-format tiles. The adhesive must be selected according to the substrate material and the installation location. For this tile size, unsuitable mortar or adhesive increases the risk of tile detachment.



برد.

Correct and Uniform Grouting**3**

To create uniform joints between the tiles, use 3-5 mm cross spacers.

**Keep the Protective Film on Polished Tiles****4**

For polished tiles, keep the protective nylon film on the tile surface until all installation and grouting work is complete. Remove it only at the final stage.

Observe the Tile Installation Direction**5**

Install each tile according to the arrow shown on the back of the tile. This ensures that the pattern and veining is maintained correctly.

ب کاشی

ت فلش درج شده در پشت کاشی نصب شود تا ج



Clean Immediately After Installation**6**

After installation is complete, clean the tile surface as soon as possible. Considering the type and characteristics of the tile surface, this helps prevent stains, adhesive, or grouting materials from remaining on the surface.

ن در اسرع وقت انجام شود تا با توجه به نوع و ویژگی سطح ک
بری شود.

**Final Check Before the Adhesive Dries****7**

Check that the tiles are level. Check for height differences between adjacent pieces. Make sure the tile patterns and veins are aligned with one another. Do not move the tiles after the adhesive has set.

NOTE: Check the tiles before continuing installation

After the initial installation, carefully inspect the tile surface and quality. To prevent further damage, if any possible defect is observed, do not install more than 20 m² of tile; report the matter for inspection and follow-up.

We hope choosing Fakhar brings lasting beauty and a good feeling to your home.